


10

USES


- Panels
- Upholstered Walls
- Upholstery
- Wallcovering
- Xorel Artform

CONTENTS


100% IFR Xorel®

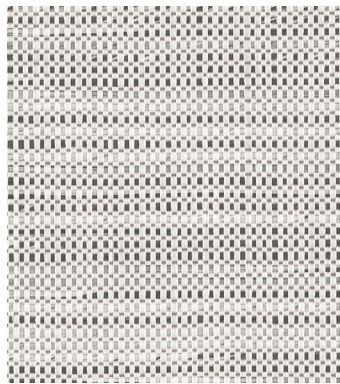

14

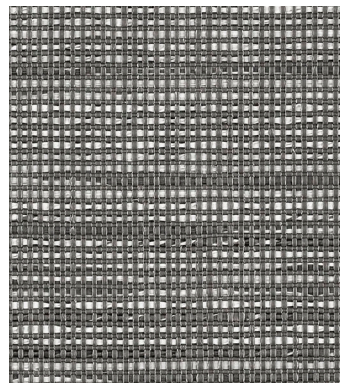

15

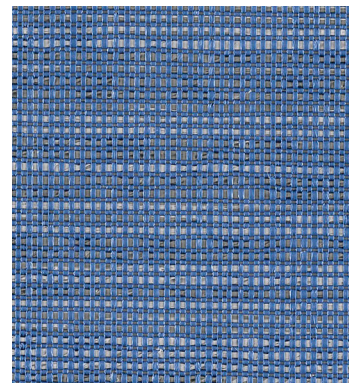


11

Carnegie Xorel®



12

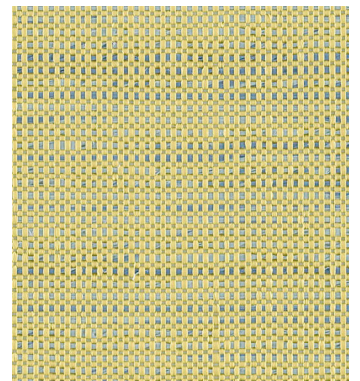

13

USES	Panels, Upholstered Walls, Upholstery, Wallcovering, Xorel Artform								
BACKINGS/WIDTHS	<table> <tr> <td>Unbacked</td> <td>56 in / 142 cm</td> </tr> <tr> <td>Acrylic Backed</td> <td>54 in / 137 cm</td> </tr> <tr> <td>X-Protect Sit™</td> <td>54 in / 137 cm</td> </tr> <tr> <td>X-Protect Wall™</td> <td>52 in / 132 cm</td> </tr> </table>	Unbacked	56 in / 142 cm	Acrylic Backed	54 in / 137 cm	X-Protect Sit™	54 in / 137 cm	X-Protect Wall™	52 in / 132 cm
Unbacked	56 in / 142 cm								
Acrylic Backed	54 in / 137 cm								
X-Protect Sit™	54 in / 137 cm								
X-Protect Wall™	52 in / 132 cm								
CONTENTS	100% IFR Xorel®								
FLAME RETARDANCY	ASTM E84 Class A / Class 1, Fabric meets Underwriters Laboratory(UL) 1286 Flammability Requirements for Office Furnishings, NFPA 265 Room Corner Test, FAA 25.853 (a&b), NYC 294-40 SR, NFPA 260 Class 1, California Technical Bulletin 117 - 2013, Canadian ULC S102								
DURABILITY	No wear 1 million double rubs*								
ECO INFO	<p>Cradle to Cradle Certified™ Silver facts™ Certified Silver LEED SCS Indoor Advantage™ Gold Free of Antimicrobials, Antimony, Bisphenol A (BPA), Chlorine, DMF, Fluorocarbons, Formaldehyde, Halogenated fire retardants, Heavy metals, Ozone-depleting chemicals, PFC, Phthalates, Plasticizers, PVC, Solvents, Stain resistant finishes No topical finishes Antimicrobial, Antibacterial, Safely Disposable, Extremely low VOCs Responsible Return Program</p>								
ACOUSTICS	NRC of 1.05 when wrapped around a 2" thick panel Test Method ASTM C 423								
CLEANING CODES	WS & BC - Water / Solvent & Bleach Cleanable								
NOTES	<p>X-Protect: Proprietary Xorel backing technology which prevents stains and moisture from passing through the textile enabling the wall or seating surface to be aggressively cleaned A summary of the results of 65 independent tests on Xorel is available at carnegiefabrics.com</p>								

*Results above 100,000 double rubs have not been shown to be a reliable indicator of increased fabric lifespan.

