






160

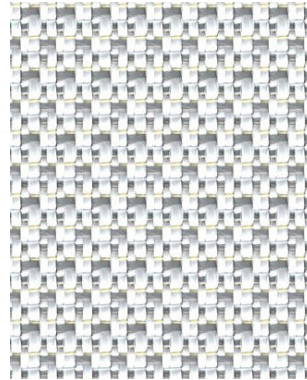


161

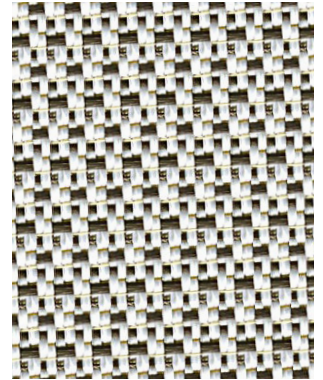


162

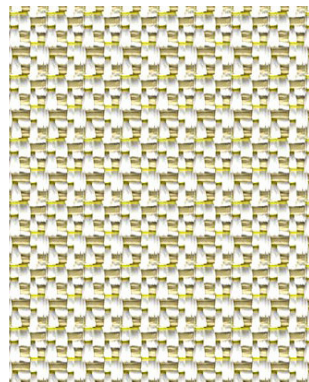


163

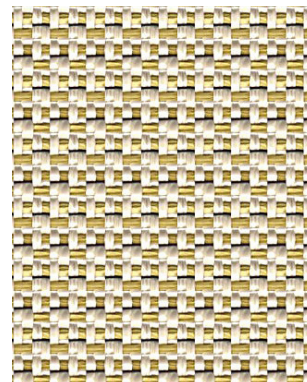


164

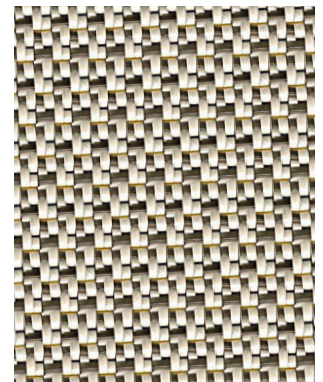


165

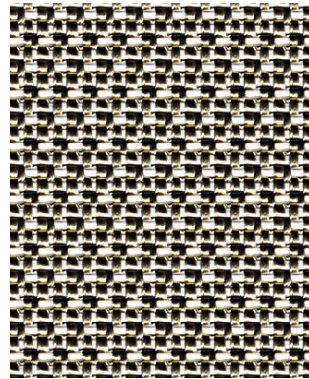


166

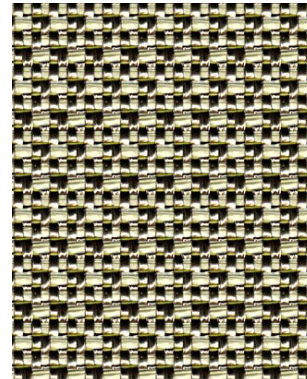


167

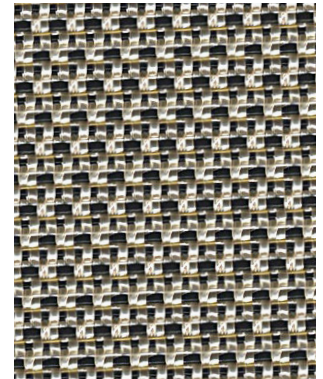

169

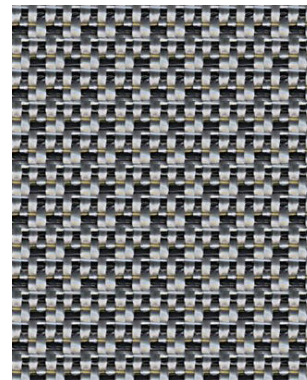

170

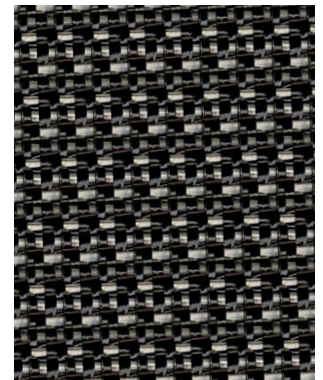

171

USES  
Panels  
Upholstered Walls  
Upholstery  
Wallcovering

CONTENTS  
100% IFR Xorel®

Carnegie Xorel®

# Prism

6621

<b>USES</b>	Panels, Upholstered Walls, Upholstery, Wallcovering
<b>BACKINGS/WIDTHS</b>	Unbacked 56 in / 142 cm Acrylic Backed 54 in / 137 cm X-Protect Sit™ 54 in / 137 cm X-Protect Wall™ 52 in / 132 cm
<b>CONTENTS</b>	100% IFR Xorel®
<b>FINISH</b>	Finish Free
<b>FLAME RETARDANCY</b>	ASTM E84 Class A / Class 1, Fabric meets Underwriters Laboratory(UL) 1286 Flammability Requirements for Office Furnishings, FAA 25.853 (a&b), NYC 294-40 SR, NFPA 260 Class 1, California Technical Bulletin 117 - 2013, 265 Room Corner Test, Canadian ULC S102
<b>DURABILITY</b>	No wear 1 million double rubs*
<b>ECO INFO</b>	Cradle to Cradle Certified™ Silver facts™ Certified Silver LEED SCS Indoor Advantage™ Gold Free of Antimicrobials, Antimony, Bisphenol A (BPA), Chlorine, DMF, Fluorocarbons, Formaldehyde, Halogenated fire retardants, Heavy metals, Ozone-depleting chemicals, PFC, Phthalates, Plasticizers, PVC, Solvents, Stain resistant finishes No topical finishes Antimicrobial, Antibacterial, Safely Disposable, Extremely low VOCs Responsible Return Program
<b>ACOUSTICS</b>	NRC of 1.05 when wrapped around a 2" thick panel Test Method ASTM C 423
<b>CLEANING CODES</b>	WS & BC - Water / Solvent & Bleach Cleanable
<b>NOTES</b>	X-Protect: Proprietary Xorel backing technology which prevents stains and moisture from passing through the textile enabling the wall or seating surface to be aggressively cleaned A summary of the results of 65 independent tests on Xorel is available at <a href="http://carnegiefabrics.com">carnegiefabrics.com</a>

\*Results above 100,000 double rubs have not been shown to be a reliable indicator of increased fabric lifespan.

