

**USES**


Panels  
Upholstered Walls  
Upholstery  
Wallcovering  
Xorel Artform

**CONTENTS**

100% IFR Xorel®


Carnegie Xorel®



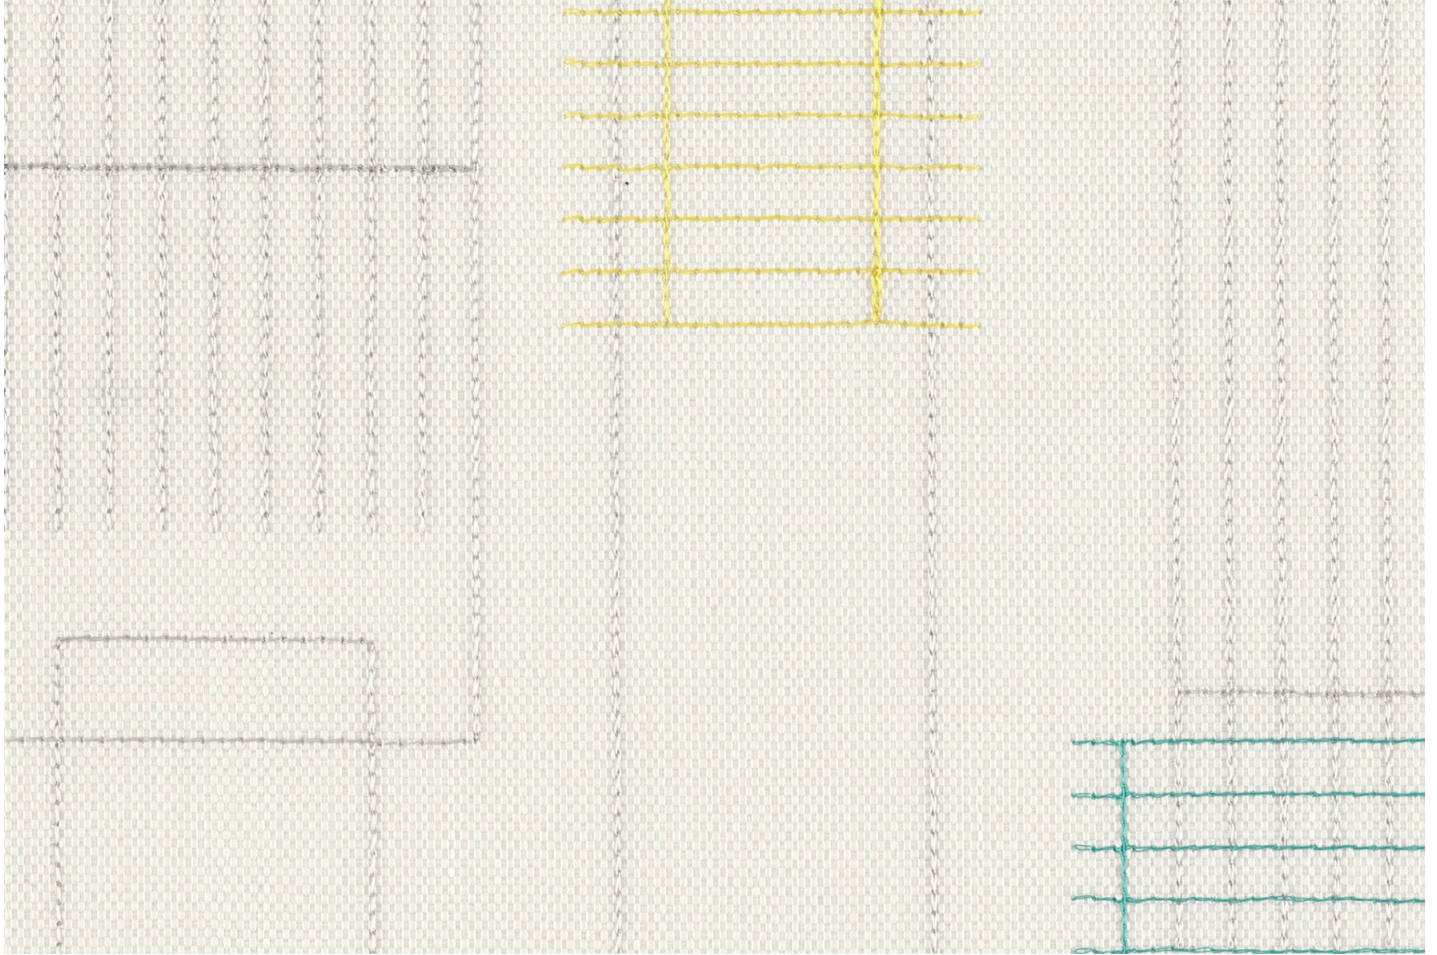


Shown on front

2

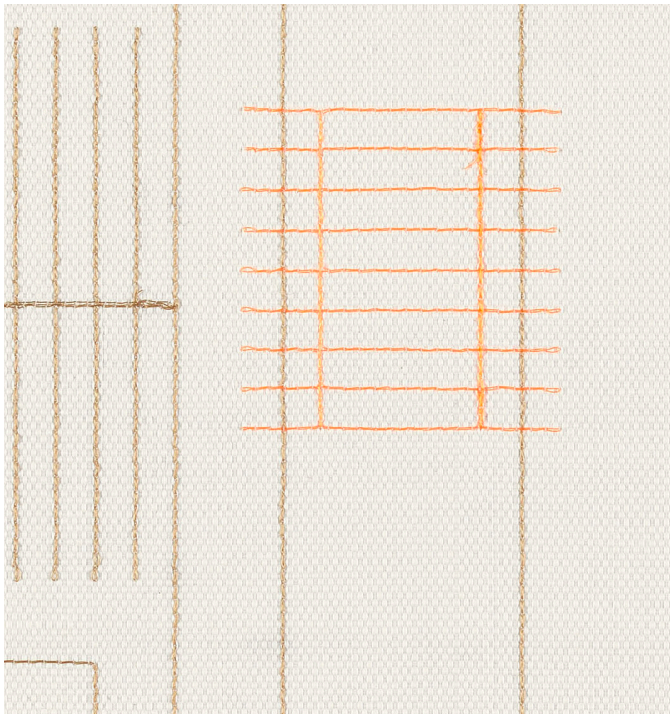

3

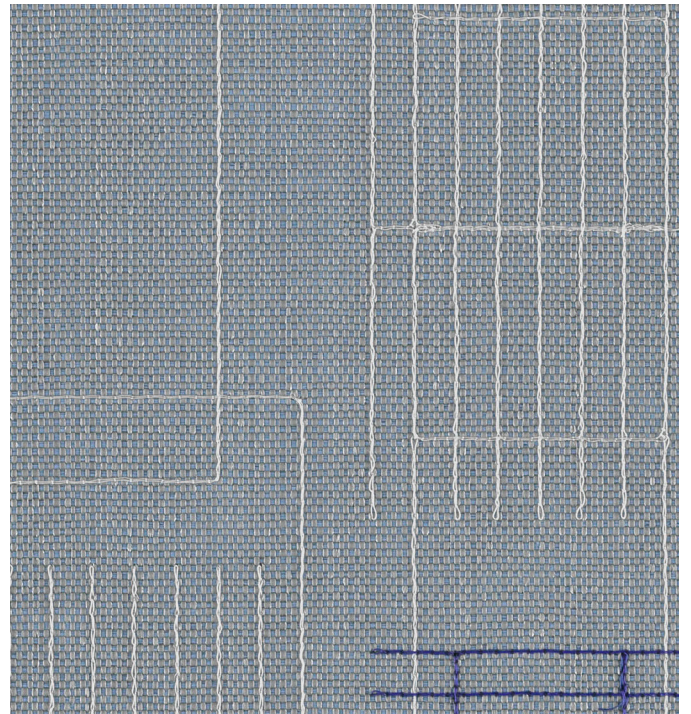

1

<b>USES</b>	Panels, Upholstered Walls, Upholstery, Wallcovering, Xorel Artform										
<b>BACKINGS/WIDTHS</b>	<table border="0"> <tr> <td>Unbacked</td> <td>56 in / 142 cm</td> </tr> <tr> <td>Acrylic Backed</td> <td>54 in / 137 cm</td> </tr> <tr> <td>X-Protect Sit™</td> <td>54 in / 137 cm</td> </tr> <tr> <td>X-Protect Wall™</td> <td>52 in / 132 cm</td> </tr> <tr> <td>Usable Width</td> <td>48 in / 122 cm</td> </tr> </table>	Unbacked	56 in / 142 cm	Acrylic Backed	54 in / 137 cm	X-Protect Sit™	54 in / 137 cm	X-Protect Wall™	52 in / 132 cm	Usable Width	48 in / 122 cm
Unbacked	56 in / 142 cm										
Acrylic Backed	54 in / 137 cm										
X-Protect Sit™	54 in / 137 cm										
X-Protect Wall™	52 in / 132 cm										
Usable Width	48 in / 122 cm										
<b>CONTENTS</b>	100% IFR Xorel®										
<b>REPEAT</b>	14.75 in (37.47 cm) length, 9.9375 in (25.24 cm) width										
<b>FLAME RETARDANCY</b>	ASTM E84 Class A / Class 1, Fabric meets Underwriters Laboratory(UL) 1286 Flammability Requirements for Office Furnishings, FAA 25.853 (a&b), NYC 294-40 SR, NFPA 260 Class 1, California Technical Bulletin 117 - 2013, 265 Room Corner Test, Canadian ULC S102										
<b>DURABILITY</b>	No wear 200,000 double rubs*										
<b>ECO INFO</b>	<p>Cradle to Cradle Certified<sup>CM</sup> Silver            facts<sup>CM</sup> Certified Silver            LEED            SCS Indoor Advantage<sup>TM</sup> Gold            Free of Antimicrobials, Antimony, Bisphenol A (BPA), Chlorine, DMF, Fluorocarbons, Formaldehyde, Halogenated fire retardants, Heavy metals, Ozone-depleting chemicals, PFC, Phthalates, Plasticizers, PVC, Solvents, Stain resistant finishes            No topical finishes            Antimicrobial, Antibacterial, Safely Disposable, Extremely low VOCs            Responsible Return Program</p>										
<b>ACOUSTICS</b>	NRC of 0.90 when wrapped around a 2" thick panel Test Method ASTM C 423										
<b>CLEANING CODES</b>	WS & BC - Water / Solvent & Bleach Cleanable										
<b>NOTES</b>	<p>X-Protect: Proprietary Xorel backing technology which prevents stains and moisture from passing through the textile enabling the wall or seating surface to be aggressively cleaned            A summary of the results of 65 independent tests on Xorel is available at <a href="http://carnegiefabrics.com">carnegiefabrics.com</a></p>										

\*Results above 100,000 double rubs have not been shown to be a reliable indicator of increased fabric lifespan.

©Copyright 2020 Carnegie Fabrics

