

Xorel
ARTFORM®

Range 3D


Acoustic tile



Range 3D Tiles in Ion 6151 color 34, Sahara Matte 6089 colors 602 and 621

Range 3D Panel Specifications

SIZES	Style/Size	Substrate	Dimensions	Depth	Weight
Small		Quiet-Core™	10" x 10"	2 1/4"	.60 lbs
		Quiet-Core Plus™	10" x 10"	2 3/8"	.70 lbs
Large		Quiet-Core™	20" x 20"	2 1/2"	2 lbs
		Quiet-Core Plus™	20" x 20"	2 5/8"	2.5 lbs

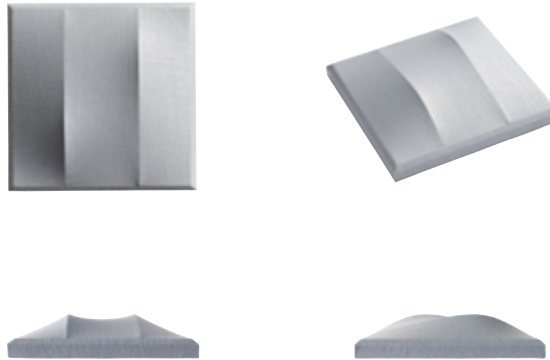

VOC EMISSIONS CDPH (CA 01350) Compliant TVOC: <0.5 mg/m3

FIRE RATING ASTM E84 Class A/Class 1

XOREL SUSTAINABILITY



CUSTOM OPTIONS Custom sizes available.

BOX SETS 4 prefabricated tiles per box. Each box includes all installation and adhesive materials. Boxes weigh 6 lbs (Small) and 13 lbs (Large). Minimum order quantity is 1 box.

LEAD TIME / WARRANTY Fast delivery: 7-8 week lead time
5 year warranty

All Xorel fabrics are C2C Certified. Visit xorelartform.com for more information.

© 2024 Carnegie Fabrics, Inc. Xorel is a registered trademark of Carnegie Fabrics Inc.

Substrates and Acoustics


SUBSTRATES

1" Quiet-Core™ Acoustical substrate NRC 0.70	1 1/8" Quiet-Core Plus™ Acoustical substrate NRC 0.80
-----------------------------------------------------------	--------------------------------------------------------------------

Range 3D Tile Sound Absorption

Frequency	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	NRC	SAA
Abs. Coeff. (No Air Gap)	0.16	0.39	1.17	0.77	0.42	0.33	0.70	0.69

Acoustic data is measured in Absorption Coefficient per square foot of material. For more information, see the full acoustic test.

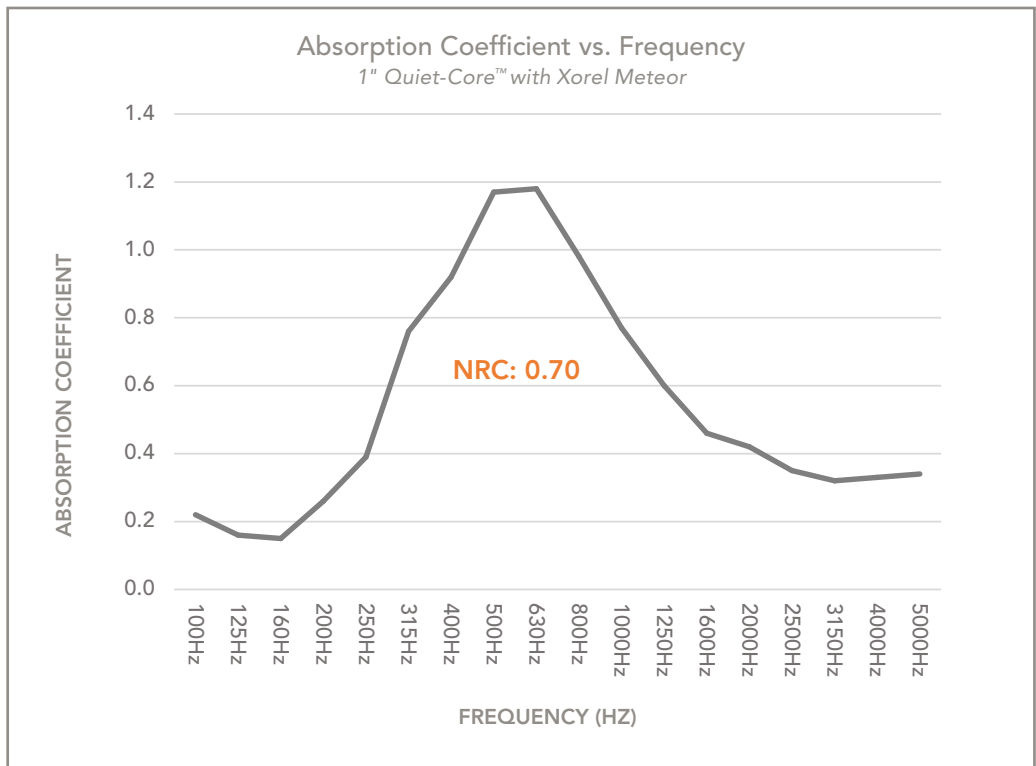

Xorel Textiles

With over 350 textures and colors to choose from, your possibilities are unlimited. See more at xorelartform.com



All Xorel fabrics are C2C Certified.
Visit xorelartform.com for more information.

© 2024 Carnegie Fabrics, Inc. Xorel is a registered trademark of Carnegie Fabrics Inc.

Installation

Range 3D tiles are lightweight and install simply with Quick Grab adhesive, 3M Command™ strips or Velcro® fasteners for sheetrock walls. For concrete walls and ceilings, panels can be installed with Quick Grab Concrete.

Flush Mounting Options

Quick Grab

Quick Grab adhesive is a VOC-compliant construction adhesive with very low odor for little to no off-gassing. It fits standard caulk guns for easy installation.

Quick Grab Concrete

Xorel Artform can be installed on flat and smooth concrete surfaces with Quick Grab Concrete. Use on highly textured surfaces could potentially result in uneven installation.

3M Command™ Strips

Command Strip install method enables the product to be mounted securely and then removed with no damage to the panels or painted wall. Panels then can be boxed and transported to the next location and mounted again; even in a new configuration.

Velcro® Fasteners

Velcro fasteners are also offered as a flexible mounting option.

To ensure complete customer satisfaction and achieve superior installation results, a Preferred Installer Network of vetted and trained professionals expert in the capabilities, ordering and installation practice of Xorel Artform is available as an added service.





Range 3D Tiles in Ion 6151 color 34, Sahara Matte 6089 colors 602 and 621

Xorel
ARTFORM[®]

Learn more and request your free sample:

800.727.6770 | acousticsolutions@carnegiefabrics.com

carnegieacousticsolutions.com

Carnegie Acoustic
SOLUTIONS