

USES


Panels
Upholstered Walls
Upholstery
Wallcovering
Xorel Artform

CONTENTS



100% IFR Xorel®

Carnegie Xorel®



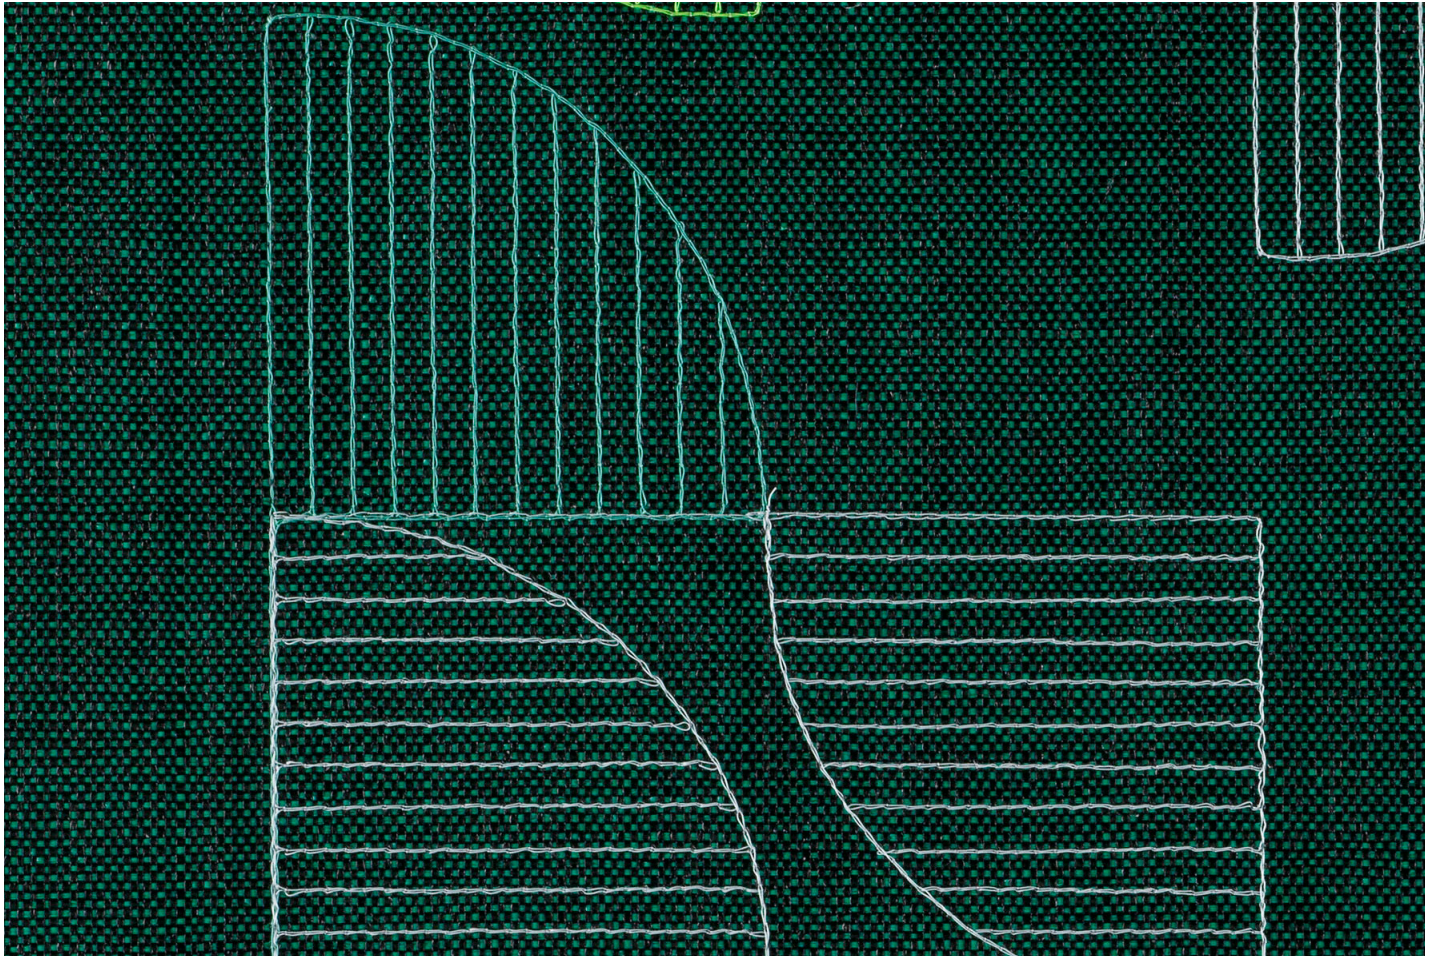

Shown on front

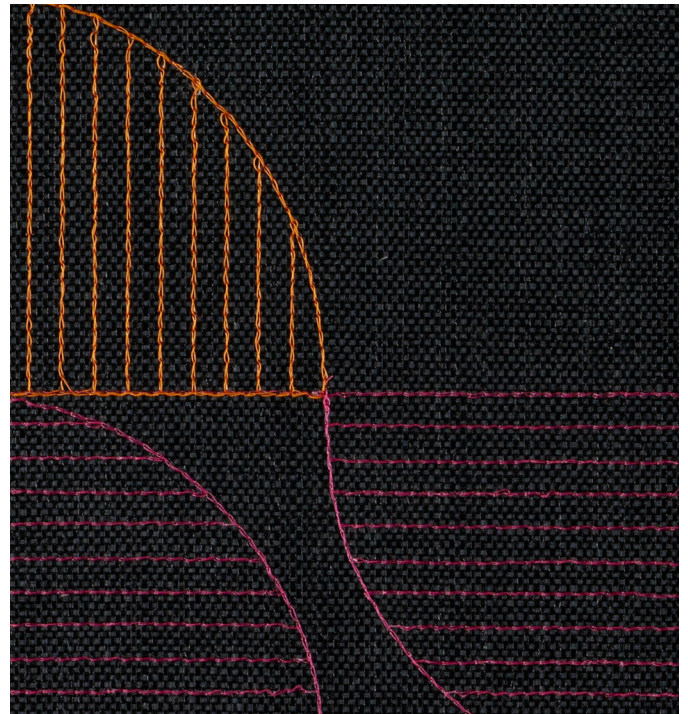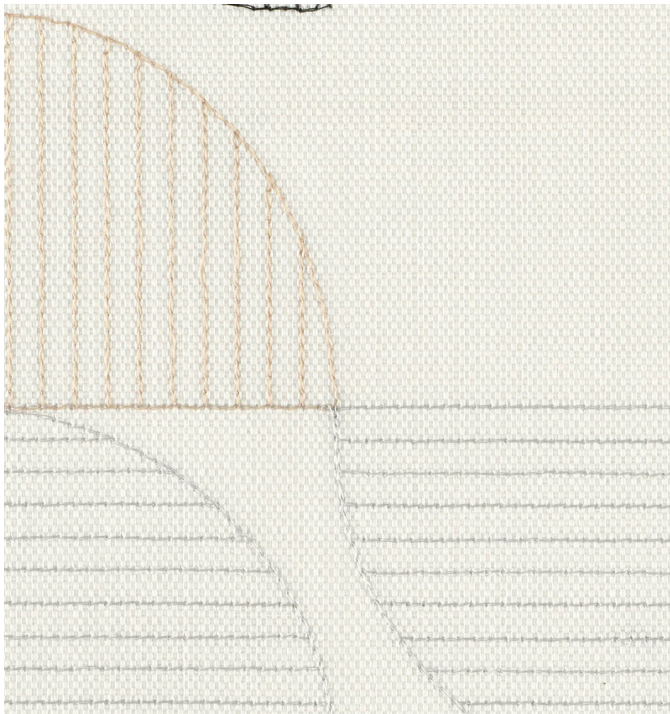

USES	Panels, Upholstered Walls, Upholstery, Wallcovering, Xorel Artform										
BACKINGS/WIDTHS	<table border="0"> <tr> <td>Unbacked</td> <td>56 in / 142 cm</td> </tr> <tr> <td>Acrylic Backed</td> <td>54 in / 137 cm</td> </tr> <tr> <td>X-Protect Sit™</td> <td>54 in / 137 cm</td> </tr> <tr> <td>X-Protect Wall™</td> <td>52 in / 132 cm</td> </tr> <tr> <td>Usable Width</td> <td>52 in / 132 cm</td> </tr> </table>	Unbacked	56 in / 142 cm	Acrylic Backed	54 in / 137 cm	X-Protect Sit™	54 in / 137 cm	X-Protect Wall™	52 in / 132 cm	Usable Width	52 in / 132 cm
Unbacked	56 in / 142 cm										
Acrylic Backed	54 in / 137 cm										
X-Protect Sit™	54 in / 137 cm										
X-Protect Wall™	52 in / 132 cm										
Usable Width	52 in / 132 cm										
CONTENTS	100% IFR Xorel®										
REPEAT	14.56 in (36.98 cm) length, 17.52 in (44.5 cm) width										
FLAME RETARDANCY	ASTM E84 Class A / Class 1, Fabric meets Underwriters Laboratory(UL) 1286 Flammability Requirements for Office Furnishings, FAA 25.853 (a&b), NYC 294-40 SR, NFPA 260 Class 1, California Technical Bulletin 117 - 2013, 265 Room Corner Test, Canadian ULC S102										
DURABILITY	No wear 200,000 double rubs*										
ECO INFO	<p>Cradle to Cradle Certified^{CM} Silver facts^{CM} Certified Silver LEED SCS Indoor AdvantageTM Gold Free of Antimicrobials, Antimony, Bisphenol A (BPA), Chlorine, DMF, Fluorocarbons, Formaldehyde, Halogenated fire retardants, Heavy metals, Ozone-depleting chemicals, PFC, Phthalates, Plasticizers, PVC, Solvents, Stain resistant finishes No topical finishes Antimicrobial, Antibacterial, Safely Disposable, Extremely low VOCs Responsible Return Program</p>										
ACOUSTICS	NRC of 0.90 when wrapped around a 2" thick panel Test Method ASTM C 423										
CLEANING CODES	WS & BC - Water / Solvent & Bleach Cleanable										
NOTES	<p>X-Protect: Proprietary Xorel backing technology which prevents stains and moisture from passing through the textile enabling the wall or seating surface to be aggressively cleaned A summary of the results of 65 independent tests on Xorel is available at carnegiefabrics.com</p> <p>*Results above 100,000 double rubs have not been shown to be a reliable indicator of increased fabric lifespan.</p> <p>©Copyright 2020 Carnegie Fabrics</p>										

